




Construction set Van der Valk

Residential water heating set - 4 panels - Plain tile roof- Vertical panel mounting

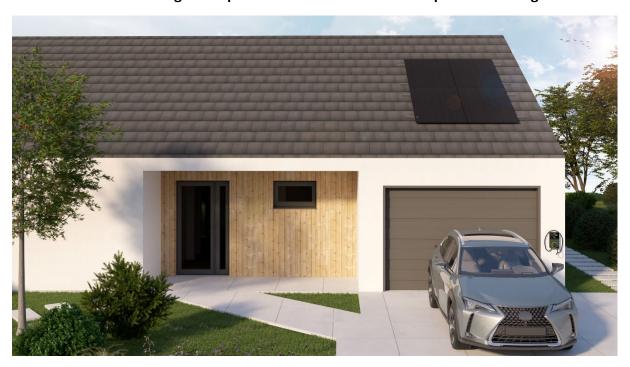

Set Description:

Set for pitched roof with plain tile roof tile for installation of four photovoltaic panels (the configuration of the set was developed for a panel size: $2261 \times 1134 \times 30$ mm and rafter spacing 1 m).

In case of a different panel arrangement than shown, the optimal number of construction material cannot be guaranteed.

The calculation was carried out according to EN 1991 - 1 - 3.

The number of structural elements was designed for houses with pitched roofs in the area:

- Terrain category: III.
- Snow load area: I.
- Wind load area II.

If you have any questions, please contact our construction department: konstrukce@solsol.cz

Set includes:

Alu mid panel clamp for alu profile - T30 - clamping range 28-50mm	4 pcs
End panel clamp for alu profile - T30 - clamping range 28-50mm	8 pcs
Alu coupling for Side++ profile with 4x hammerhead bolt M8x20mm	2 pcs
Ss torx-screw 5,5x58mm - T30	25 pcs
Alu Side++ profile L=3520mm XXL	3 pcs
Ss Smartline roof hook + hammerhead bolt + flange nut	12 pcs
Plastic shim 3mm for Smartline roof hook	36 pcs
Weight	15,54 kg