


# MOD 3~10KTL3-XH(BP)

- Battery ready, future proof
- Dual MPP Trackers
- Type II SPD on DC and AC side
- Active Arcing Protection
- 24h self-consumption monitoring

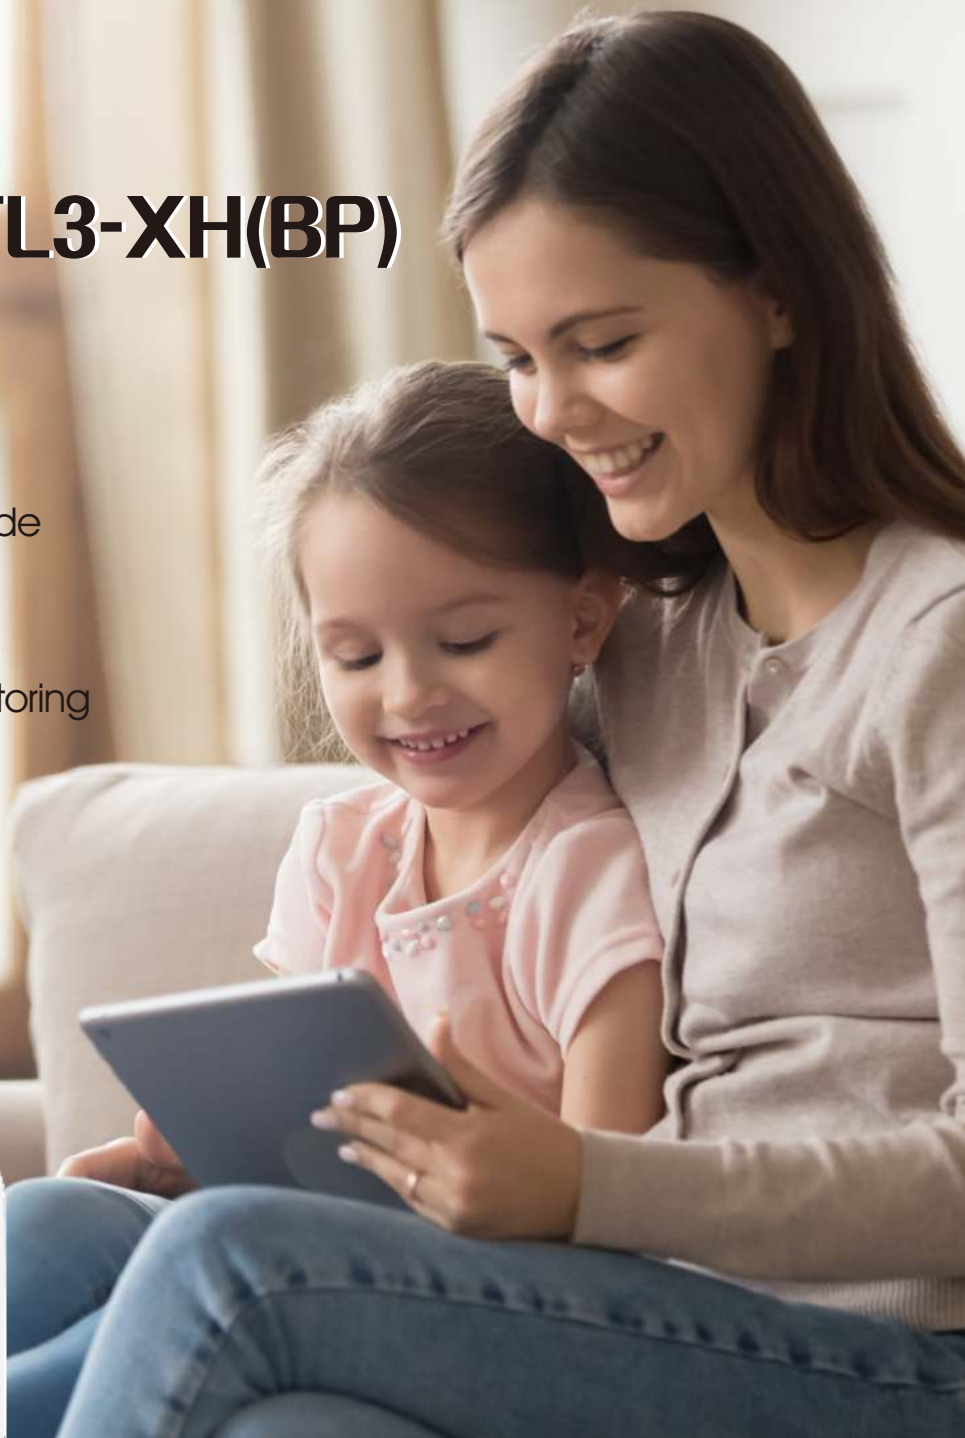

**GROWATT**

[www.ginverter.com](http://www.ginverter.com)

**SOLSOL**

SOLSOL s.r.o.  
Králůva 298/4, Brno, 616 00,  
Czech Republic  
[sales@solsol.cz](mailto:sales@solsol.cz)  
[www.solsol.cz](http://www.solsol.cz)

P O W E R  
- I N G  
T O M O -  
R R O W O

Datasheet	MOD 3000TL3-XH	MOD 4000TL3-XH	MOD 5000TL3-XH	MOD 6000TL3-XH	MOD 7000TL3-XH	MOD 8000TL3-XH	MOD 9000TL3-XH	MOD 10KTL3-XH
<b>Input data (DC)</b>								
Max. recommended PV power (for module STC)	6000W	8000W	10000W	12000W	14000W	16000W	18000W	20000W
Max. DC voltage	1100V							
Start voltage	160V							
Nominal voltage	600V							
MPPT voltage range	140V-1000V							
No. of MPP trackers/strings per MPP tracker	2/1							
Max. input current per MPP tracker	16A							
Max. short-circuit current per MPP tracker	20A							
<b>Input data (DC battery)</b>								
Compatible battery	APX HV Battery System (5kWh-30kWh)							
Operating voltage range	600 V-950 V							
Max. operating current	11A				18.5A			
Max. charge power	6000W				10000W			
Max. discharge power	3300W	4400W	5500W	6600W	7700W	8800W	9900W	11000W
<b>Output data (AC)</b>								
AC nominal power	3000W	4000W	5000W	6000W	7000W	8000W	9000W	10000W
Max. AC apparent power	3300VA	4400VA	5500VA	6600VA	7700VA	8800VA	9900VA	11000VA
Nominal AC voltage (range*1)	220V/380V, 230V/400V (340-440V)							
AC grid frequency (range*1)	50/60 Hz (45-55Hz/55-65 Hz)							
Max. output current	5.0A	6.7A	8.3A	10.0A	11.7A	13.3A	15.0A	16.7A
Adjustable power factor	0.8leading...0.8lagging							
THDi	<3%							
AC grid connection type	3W+N+PE							
<b>Output data (Backup*2)</b>								
Max. apparent power	3000VA	4000VA	5000VA	6000VA	7000VA	8000VA	9000VA	10000VA
Nominal AC voltage	230V/400V							
AC grid frequency	50/60Hz							
<b>Efficiency</b>								
MAX. efficiency	98.3%	98.3%	98.3%	98.3%	98.6%	98.6%	98.6%	98.6%
European efficiency	97.5%	97.5%	97.5%	97.5%	98.1%	98.1%	98.1%	98.1%
MPPT efficiency	99.9%							
<b>Protection devices</b>								
DC reverse polarity protection	Yes							
DC Switch	Yes							
AC/DC surge protection	Type II / Type II							
Insulation resistance monitoring	Yes							
AC short-circuit protection	Yes							
Ground fault monitoring	Yes							
Grid monitoring	Yes							
Anti-islanding protection	Yes							
Residual-current monitoring unit	Yes							
String fault monitoring	Yes							
AFCI protection	Optional							
<b>General data</b>								
Dimensions (W / H / D)	425/387/147mm	425/387/147mm	425/387/147mm	425/387/147mm	425/387/178mm	425/387/178mm	425/387/178mm	425/387/178mm
Weight	12.5kg	12.5kg	12.5kg	12.5kg	14kg	14kg	14kg	14kg
Operating temperature range	- 25°C ... +60°C							
Nighttime power consumption	< 5.5W							
Topology	Transformerless							
Cooling	Natural convection							
Protection degree	IP66							
Relative humidity	0~100%							
Altitude	4000m							
DC connection	H4/MC4(Optional)							
AC connection	Connector							
Display	OLED + LED/WIFI + APP							
Interfaces: USB/RS485/WIFI /GPRS/LAN/RF	Yes/Yes/Optional/Optional/Optional/Optional							
Warranty: 5 years /10 years	Yes/Optional							

CE, VDE0126, Greece, EN50549, C10/C11, VFR 2019, IEC62116, IEC61727, IEC 60068, IEC 61683, CEI0-21, N4105, TOR Erzeuger G98/G99, G100, AS4777, UNE217001, UNE206007, PO12.2

\*1 The AC voltage range and frequency range may vary depending on specific country grid standard. All specifications are subject to change without notice.

\*2 The backup function is ready for the BP version with Backup table by using the SYN 50-XH-30 device.