

# SOLID Agro

Glass/Glass

40 cell  
Frameless



Self-cleaning  
effect




Extreme load  
resistance



Fire class A




Salt mist  
resistance



Ammonia  
resistance



Dust and sand  
resistance

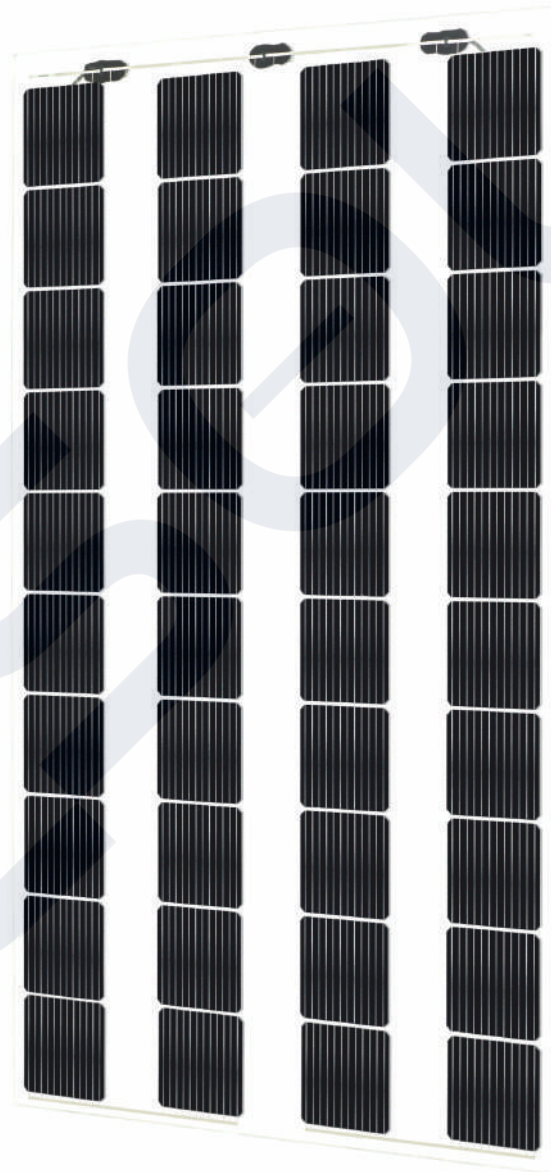

Positive sorting up to +5W

Front side ⚡ 240 W

30 Year  
product  
warranty

87 % Power  
guarantee

30 Year  
efficiency  
guarantee

SOLSOL

SOLSOL s.r.o.  
Králova 298/4, Brno 616 00, Czech Republic  
sales@solsol.cz , www.solsol.cz

SOLI  TEK


G052020-1

Electrical data (STC*)	
Maximum power	<b>240</b>
Cell technology	<b>Bifacial</b>
Open circuit voltage ( $V_{oc}/V$ )	26,78
Short circuit current ( $I_{sc}/A$ )	11,09
Max power voltage ( $V_{mpp}/V$ )	22,91
Max power current ( $I_{mpp}/A$ )	10,48
Module efficiency ( $\eta$ )	12,92%
Max system voltage (V)	1500
Max current (A)	15
Power tolerance	0/+5W

\*Under standard test conditions (STC) of irradiance of 1000W/sq.m., spectrum AM 1.5 and cell temperature of 25°C. Flash testing measurement accuracy of +/-5%. All transparency values are approximate +/-3%.

Additional power gain	5%	10%	20%	25%
Total module power (Wp)	252	264	288	300

### Dimensions & Mounting

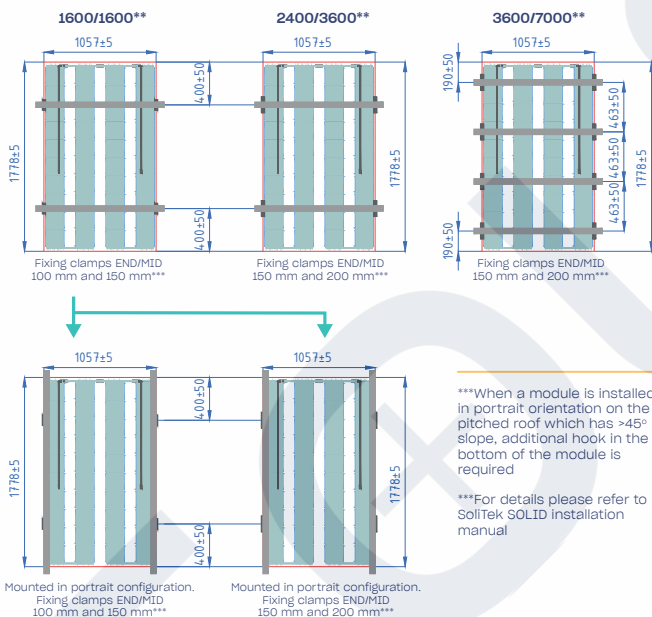

Temperature ratings	
Current temperature coefficient ( $\alpha$ )	+0.04% / °C
Voltage temperature coefficient ( $\beta$ )	-0.35% / °C
Power temperature coefficient ( $\delta$ )	-0.47% / °C
Nominal operating module temperature	46 °C
Mechanical data	
Dimensions (LxWxH) (mm)	1770x1049x7,1
Dimensions with edge sealing (LxWxH) (mm)	1778±5x1057±5x7,1
Weight (kg)	30
Front / Back glass (mm)	3
Cell Type	Bifacial
Cell Size (mm)	166x166
Busbars	9
Transparency %	40
Cell configuration	4x10
Frame	Frameless
Operating temperature (°C)	-40 ÷ +85
Design load (wind/snow) (Pa)	3600/7000**
Maximum test load (wind/snow) (Pa)	5400/10500
Junction box / IP class	Split junction box / IP68
Cable cross section size (mm²)	4
Cable length	1,2 m
Bypass diodes	2
Connector	MC4 compatible

\*\*Safety factor 1.5

### Attention

- Always check if your system is compatible with local environmental conditions (wind / snow load, temperatures) on your site to ensure safety and long-term energy production.
- Do not connect differently orientated PV panels in the same string / MPPT of the inverter (unless optimizers are used).
- Do not connect strings with an unequal amount of PV panels in one MPPT (unless optimizers are used).
- Use PV panels of same electrical parameters in one string/MPPT (unless optimizers are used).
- Always ensure that your inverter is equipped with DC disconnecter. If not it is recommended to install it externally.
- Never let different metals come in contact with each other. Use bi-metallic plates or plastic separators to eliminate galvanic corrosion.
- It is highly recommended to install SPD's in both AC and DC circuits because overvoltages void the warranty for inverters and also panels if they are harmed.
- It is highly recommended to ground PV panels mounting system and to install lightning protection in site.
- If the mounting rails are installed across the module, bifaciality effect will be lower due to cells shading.

### Tips for better power output

- Better module ventilation and shorter connection cables increase electrical energy production.
- Always observe object/mutual shading in site. Shading can drastically cut electrical energy generation output.
- Increase PV panel height from the ground so that more light can travel beneath the module and then reflect.
- The Albedo value increases significantly if the modules are installed above white, lightreflecting surfaces.



This datasheet is not legally binding. The manufacturer reserves the right to make changes to product specifications and / or product features without prior notice. The most recent versions of all documents (T&C's, datasheets, warranties and installation manuals can always be found on our website at [www.solitek.eu](http://www.solitek.eu))



PRODUCED USING 100% RENEWABLE ENERGY